


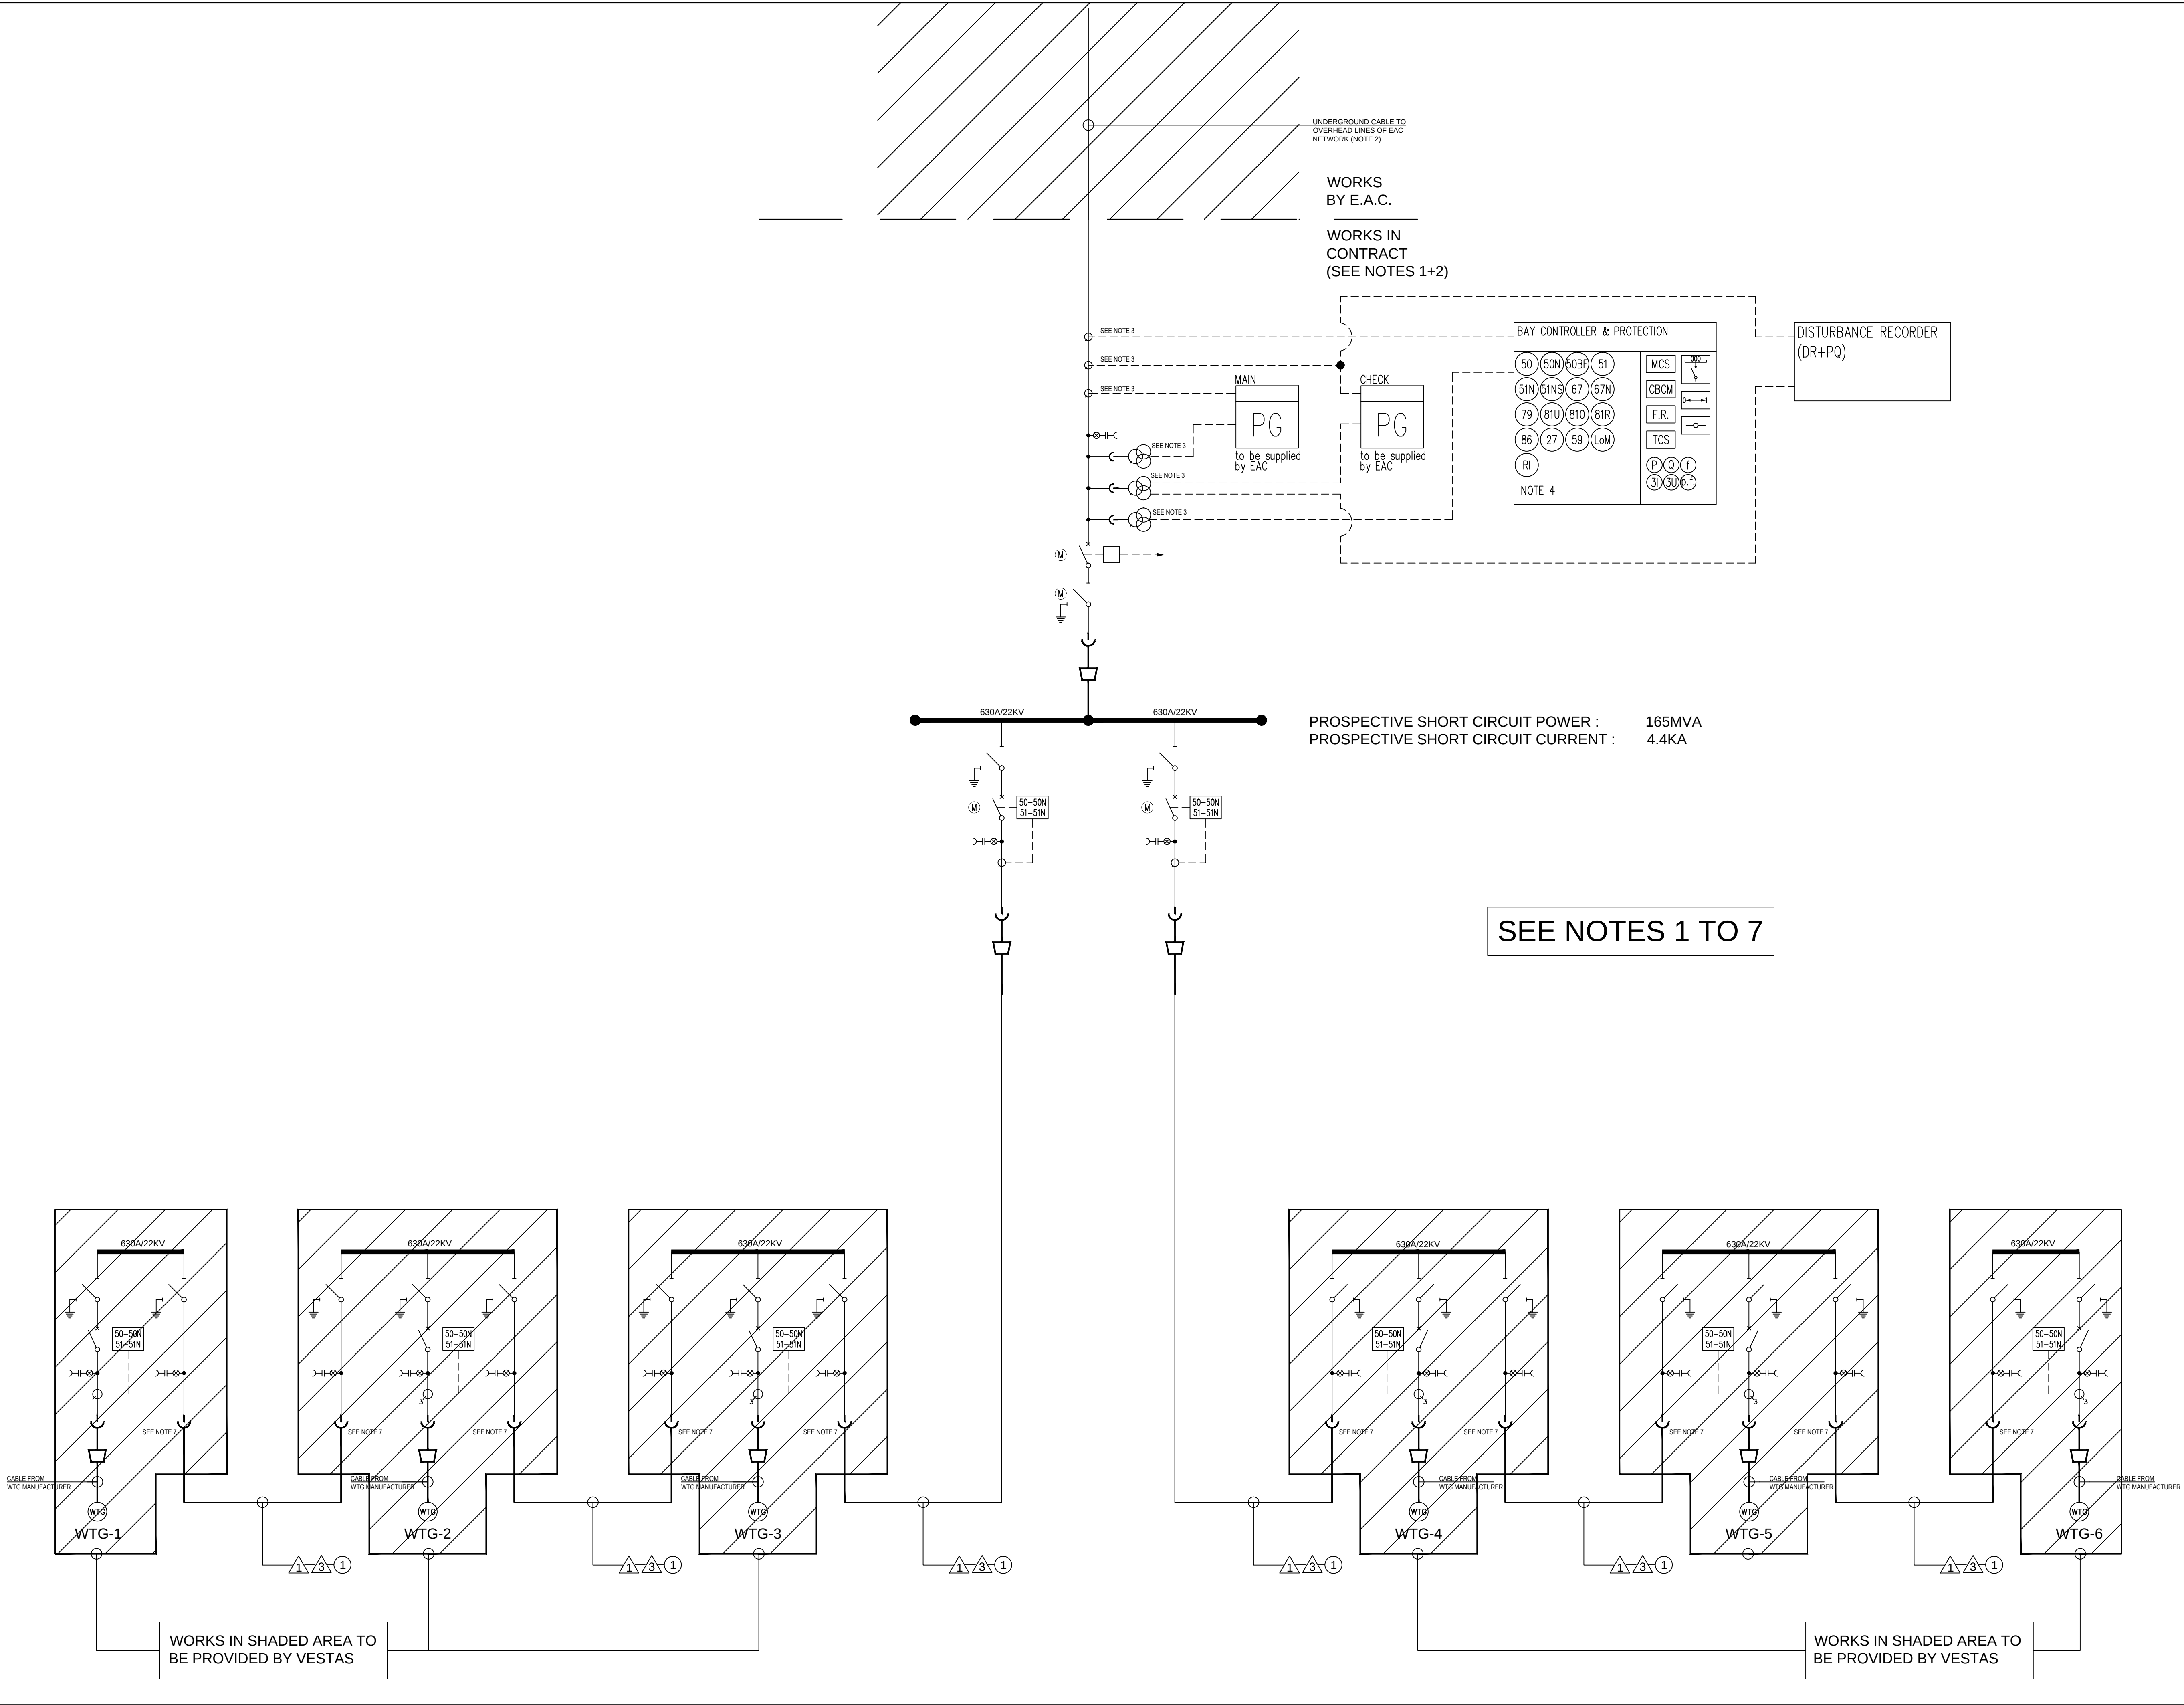

NOTES:

- THIS DRAWING SHALL BE READ IN CONJUNCTION WITH THE SPECIFICATION.
- CONTRACT WORKS SHALL INCLUDE TERMINATION OF EAC MV CABLES ONTO THE MV SWITCHGEAR UNDER THEIR DIRECT SUPERVISION AND AS PER THEIR REQUIREMENT.
- VT & CT RATIOS SHALL BE IN ACCORDANCE TO THE REQUIREMENTS. THE CTS AND VTS SHALL BE DESIGNED FOR THE PURPOSE INDICATED AND SHALL CONFORM TO THE EAC STANDARD SPECIFICATION CLAUSES 7.13 AND 7.14 RESPECTIVELY.
- FURTHER TO THE INDICATED, THE NOTED SWITCHGEAR SHALL HAVE ADDITIONAL DISCRETE DEVICE FOR THE LOSS OF MAINS (LOP) OR R.O.C.O.P. (RATE OF CHANGE OF FREQUENCY) PROTECTION, IT SHALL BE CLEAR IN THE TENDER DOCUMENTS WHICH OF THE TWO IS SELECTED.
- REFER TO SPECIFICATION FOR MV SWITCHGEAR AND MV CABLES TECHNICAL REQUIREMENT
- THE MV SWITCHGEAR TO EAC GRID SHALL BE CAPABLE OF HANDLING SCADA SIGNALS AS PER THE AUTHORITY REQUIREMENT INDICATED IN APPENDIX 8 OF THE SPECIFICATION. THE 2nd WIND TURBINE INCOMERS SHALL HANDLE THE FOLLOWING:
 - OPERATING SIGNAL / OPERATING ARCHIVE, OPERATING SIGNAL ON/OFF, COMMAND ON/OFF FOR THE DISCONNECTOR, THE EARTH SWITCH AND THE CIRCUIT BREAKER.
 - PROTECTION CURRENT OVERLOAD
 - PROTECTION CURRENT SHORT CIRCUIT
 - PROTECTION EARTH FAULT
 - MEASUREMENT FOR I, P & Q
- CONTRACT WORKS SHALL INCLUDE TERMINATION OF THE MV CABLES ON THE MV SWITCHGEAR IN THE BASE COMPARTMENT OF EACH WIND TURBINE. THE MV SWITCHGEAR WILL BE PROVIDED AND FIXED IN POSITION BY VESTAS. ALSO INCLUDED SHALL BE THE TERMINATION OF THE FIBER CABLES AND THE COPPER EARTHING CABLES AS INDICATED.

LEGEND

- MV CIRCUIT BREAKER
- NO LOAD BREAK/EARTHING SWITCH
- CAPACITIVE VOLTAGE & GAS PRESSURE INDICATOR
- VOLTAGE TRANSFORMER
- CURRENT TRANSFORMER
- BUSBAR SECTION (EXTENSIBLE UNITS)

CABLES SCHEDULE:

- 3x1c150mm² XLPE/PVC/AWA-AL MV CABLE
- 50mm² BARE Cu CABLE
- TRIPLE BUNDLE PVC PIPE Ø32 mm LOW FRICTION FOR FIBER OPTIC CABLE APPLICATIONS AS PER ELYSSE IRRIGATION LTD OR EQUAL APPROVED

ΕΛΙΟΦΩΤΟΥ, ΖΙΝΙΕΡΙΣ & ΣΤΑΣΙΣ PARTNERS	
ISSUED FOR TENDER	
SIGNATURE	DATE
K.Z	04/07/2014

UPDATED ISSUE	27-6-14	K.Z
---------------	---------	-----

ALL INDICATED DIMENSIONS SUPERCEED MEASURED DIMENSIONS ON THE DRAWINGS. ALL DIMENSIONS SHALL BE CHECKED ON SITE PRIOR TO WORKS COMMENCEMENT. ALL DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECTS FOR CLARIFICATIONS

Εργο / Project: T.P. AEOLIAN DYNAMICS WIND PARK

Πατρων / Client: T.P. AEOLIAN DYNAMICS LTD

Περιγραφή / Description: MV DISTRIBUTION NETWORK DIAGRAM

ΠΟΛΙΤΙΚΟΙ ΜΗΧΑΝΙΚΟΙ :

ΕΑΡΘΗΚΕΥΑΚΕ PROTECTED STRUCTURES

ΓΕΩΡΓΙΟΣ ΔΗΜΗΤΡΙΑΔΗΣ ΝΙΚΟΣ ΚΑΛΑΘΑΣ

Διεύθυνση 9, 3115 Λεμεσός Τηλ: 25770978 Φαξ: 25770979 email: dk_dsp@spidernet.com.cy
Αθηνών 111, 2035 Σηροβόλος Τηλ.: 22495133 φαξ: 22495123 email:earth@spidernet.com.cy

ΑΡΧΙΤΕΚΤΟΝΕΣ:

ΗΡΑΚΛΗΣ ΠΑΠΑΧΡΗΣΤΟΥ ΑΡΧΙΤΕΚΤΟΝΕΣ

Γραφείο Λεωφ. Κέννεντυ & Αριστέϊδη Χαράλαμους 1, Λευκωσία 1077, Γραφείο 401, Τηλ.: 22 475996, Fax: 22 374816, E-mail: e.papachristou@cytanet.com.cy

ELECTRICAL & MECHANICAL CONSULTING ENGINEERS

Eliafotou & Zinieris

MECHANICAL ELECTRICAL TECHNOLOGY CONSULTANTS

77, STROVOLOS AVENUE, STROVOLOS CENTER, FLAT 401, 2018 STROVOLOS – NICOSIA

Tel: 22879613 Fax:22314043 e-mail : meltec@meltec-cy.com

Αριθμός σχεδίου / Design stage	06/1.0	Κατηγορία σχεδίου / Category
Σχεδιαστής / Designer	MA/EG/ΔΕ	Ελέγχος / checked by
Αρ. προτύπου / pr. number	MA/EG/ΔΕ	Κ.Ζ.
Αρ. σχεδίου / dr. number	1291/14	E-02